





07

Skid Steer Loader-Vormax-320T

Model:Vormax-320T				
Max working height	2120mm	Engine	RATO R420 Br	iggs&Stratton 13.5HP
Max pin height	1865 mm	Rated Power (KW)	9.7Kw	10Kw
Max Dumping height	1405 mm	Rotating speed (rpm)	3600rpm	3600rpm
Max Dumping distance	575mm	Noise (Db)	≤95	≤95
Max Dumping Angle	37°	Hydraulic System		
Total height	1350 mm	Pressure (Mpa)	0-17	0-17
Ground clearance	121 mm	Flow rate	0-18L	0-21.6L
Wheel base		Operating Load	250 Kg	250Kg
Overall length without bucket	1495 mm	Bucket Capacity	0.15m³	0.15m³
Total width	1021 mm	Max Lifting Force	360 Kg	360 Kg
Bucket width	1080mm	Travel Speed	0-4.5Km/h	0-4.5Km/h
Total length with bucket	2245 mm	Operating Weight	830 Kg	830 Kg
overall length without the bucket after folding the pedal.	1990 mm	Oil		
		Fuel tank	7L	7L
		Engine oil	1.7L	1.7L
		Hydraulic tank	37L	37L

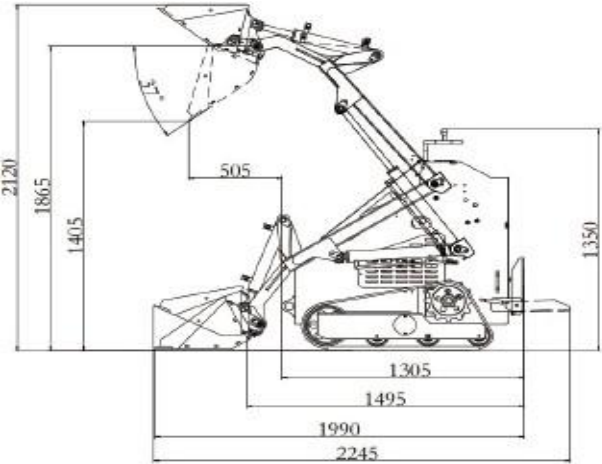



07

Skid Steer Loader-Vormax-S360



Model:Vormax-S360

Power	13.5hp/10.1kw	Speed	Max 5km/h
Engine	Briggs & Stratton	Machine width	1090 - 1150mm
Load weight (kg)	320kg	Unloading height	1458mm
Bucket capacity	0.15 m ³	Bucket width	1150mm



Replace manual labor, toss out the hand tools and get more done in hard-to-access work areas. Easy-to-use mini HTS360 loader travel and work where other machines can't, making them a popular choice for landscapers, contractors, renters and others. Don't be fooled by the small size.

Top Features
Superior Performance
Attachment Versatility
Ride-On/Walk-Behind Convenience
Compact Size
Minimal Ground Disturbance
They do serious work: digging, trenching, tilling, moving material and more.



Corporate Email:
ethan@qingdaovormaxmachinery.com


WhatsApp/WeChat:
[+86 18853773089](https://wa.me/8618853773089)



07

Skid Steer Loader-Vormax-380T

Model:Vormax-380T				
Max working height	2120mm	Engine	RATO R740-1	Briggs&Stratton 23HP
Max pin height	1865mm	Rated Power	16Kw	17Kw
Max Dumping height	1405mm	Rotating speed	3600rpm	3600rpm
Max Dumping distance	575mm	Noise (Db)	≤95	≤95
Max Dumping Angle	37°	Hydraulic System		
Total height	1350mm	Pressure (Mpa)	0-17	0-17
Ground clearance	121mm	Flow rate	0-21.6L	0-21.6L
Wheel base		Operating Load	300 Kg	300 Kg
Overall length without bucket	1495mm	Bucket Capacity	0.15m³	0.15m³
Total width	1021mm	Max Lifting Force	380 Kg	380 Kg
Bucket width	1150mm	Travel Speed	0-4.5Km/h	0-4.5Km/h
Total length with bucket	2245mm	Operating Weight	890 Kg	890 Kg
overall length without the bucket after folding the pedal.	1990 mm	Oil		
		Fuel tank	20L	20L
		Engine oil	1.7L	1.7L
		Hydraulic tank	37L	37L

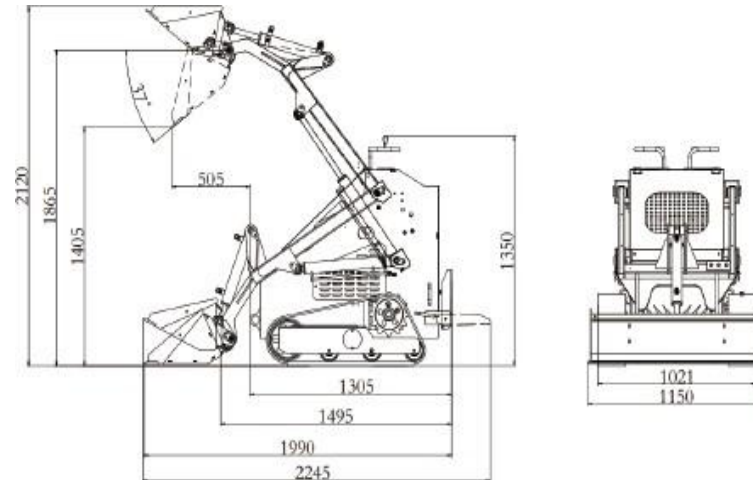



07

Skid Steer Loader-Vormax-S380



Model:Vormax-S380				
Max working height	2120mm	Engine	RATO R740-1	Briggs & Stratton23HP
Max pin height	1890 mm	Rated Power	16Kw	17Kw
Max Dumping height	1465 mm	Rotating speed	3600rpm	3600rpm
Max Dumping distance	485mm	Noise (Db)	≤95	≤95
Max Dumping Angle	32°	Hydraulic System		
Total height	1315mm	Pressure (Mpa)	0-17	0-17
Ground clearance	115mm	Flow rate	0-21.6L	0-21.6L
Wheel base	680	Operating Load	300Kg	300Kg
Overall length without bucket	1650mm	Bucket Capacity	0.15m³	0.15m³
Total width	1120mm	Max Lifting Force	380Kg	380Kg
Bucket width	1150mm	Travel Speed	0-4.5Km/h	0-4.5Km/h
Total length with bucket	2085mm	Operating Weight	800Kg	800Kg
overall length without the bucket after folding the pedal.	2035mm	Oil		
		Fuel tank	20L	20L
		Engine oil	1.7L	1.7L
		Hydraulic tank	37L	37L







07

Skid Steer Loader-Vormax-S382T

Model:Vormax-S382T				
Main Size		Performance parameter		
Maximum working height (A)	2200mm	Carrying capacity	380Kg(62% tipping load)	
Maximum pin height (B)	1884mm	Bucket volume	0.15 m ³	
Maximum discharge height (C)	1488mm	Maximum lifting force	550KG	
Maximum discharge distance (D)	348mm	Maximum lift	380 Kg	
Bucket swing Angle (β)	55°	speed	0-5.5 Km/h	
Bucket discharge Angle (γ)	30°	Operating weight	860Kg	
Suction Angle (θ)	25°	Tractive effort	No load: 520KG	
Departure Angle (α)	11°	Angle of climb	17degree	
Total height (H)	1280mm	Service time (full oil)	3-4h	
Ground height (F)	100mm	Engine		
Wheelbase (G)	860mm	Rated power (KW)	19.2KW(26HP) (Runtong brand)	
No bucket length (J)	1780mm	Rated speed (rpm)	3600	
Total width (W)	1200mm	Noise (Db)	≤95	
Bucket width (K)	1190mm	Fuel tank volume(L)	28 L	
Total length (L)(with bucket)	2500mm	Hydraulic tank volume(L)	20 L	
Front turning radius (R)	1307mm	Hydraulic system		
Working hours		System Pressure	17MPa=170bar=2465psi	
lift(S)	4.27	Standard flow	25L/min	
load(S)	1.34	Traveling pump flow	22L/min	36L/min
landing(S)	3.31	Replenishment pump flow	10L/min	13L/min
Tyre type		Working system	44L/min	44L/min
Herringbone engineered tire	18*8.5-8			

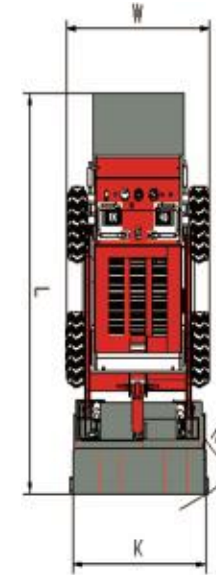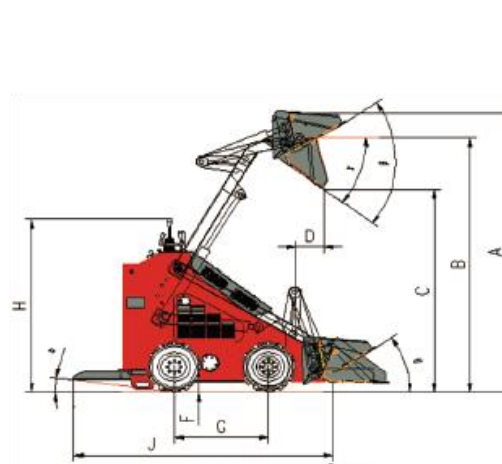




07

Skid Steer Loader-Vormax-SL390

Model:Vormax-SL390			
Max working height	2398mm	Overall length without bucket	2030mm
Max pin height	1815 mm	Total width	1050mm
Max Dumping height	1430mm	Bucket width	1050mm
Max Dumping distance	366mm	Total length with bucket	2481mm
Max Dumping Angle	23°	Engine	RatoR420
Total height	2020mm	Rated Power	10kw/3600rpm
Ground clearance	185 mm	Rotating speed	3600rpm
Wheel base	815	Noise	≤95
Pressure	0-17mpa	Flow rate	0-18L
Operating Load	250kg	Bucket Capacity	0.13m³
Max Lifting Force	200kg	Travel Speed	0-4.5km/h
Operating Weight	850kg	Fuel tank	6.5L
Engine oil	1.7L	Hydraulic tank	23L

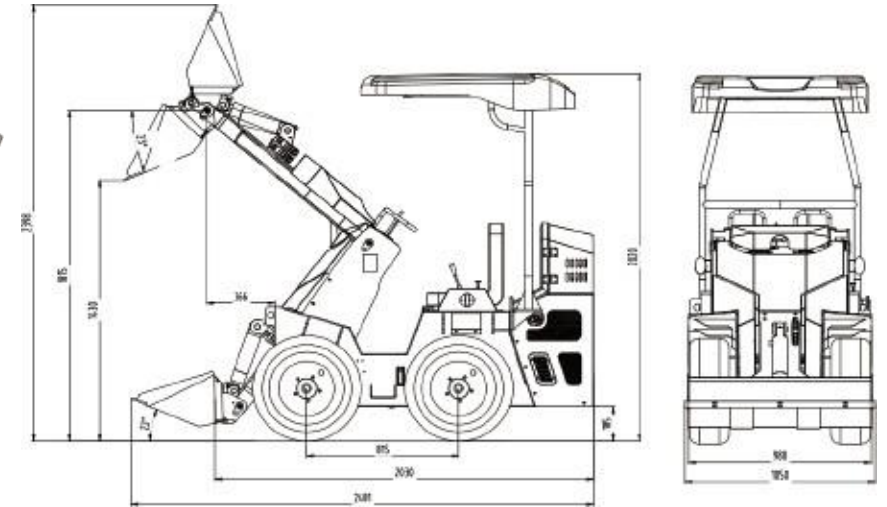



07

Skid Steer Loader-Vormax-T470



Model:Vormax- T470			
Operational Quality	1176kg	Engine	
Bucket capacity	0.12m³	Ground clearance	195mm
Climbing ability	25°	Dumping distance	231mm
Maximum breakout force	5.5kn	Track contact length	1300mm
Rated load	350kg	Dimensions	
Maximum load	480kg	Overall dimensions	2337*1070*1300mm
Travel speed	0-4km/h	Length including bucket	2337mm
Three-item sum of work	9s	Length excluding bucket	1700mm
Working system pressure	16bar	Track model	180*72*35
Bucket width	1070mm	Brand	Rato/Koop/B&S/Yanmar/Kubota
Maximum loading height	2024mm	Rated power	16.8/15/17/17.8/18.5kw
Maximum dumping height	1376mm	Cylinder	2/3
Maximum operating height	2561mm	Intake method	Naturally aspirated
Height to bucket pin	2070mm	Emission standard	EPA/ERU05
Max height bucket dump angle	63°	Fuel tank capacity	21L
Min height	1300mm		
Tail length	220mm		






07

Skid Steer Loader-Vormax-S530

Model:Vormax-S530			
Max working height	2630mm	Engine	Kubota D1105
Max pin height	2090 mm	Rated Power (KW)	14KW
Max Dumping height	1535 mm	Rotating speed (rpm)	2200
Max Dumping distance	715mm	Noise (Db)	≤93
Max Dumping Angle	38°	Hydraulic System	
Total height	1630 mm	Pressure (Mpa)	0-17
Ground clearance	150 mm	Flow rate	0-32L
Wheel base		Operating Load	450 Kg
Overall length without bucket	2220 mm	Bucket Capacity	0.2m³
Total width	1050 mm	Max Lifting Force	530 Kg
Bucket width	1150mm	Travel Speed	0-4.5Km/h
Total length with bucket	2745 mm	Operating Weight	1330 Kg
overall length without the bucket after folding the pedal.	2100 mm	Oil	
		Fuel tank	30L
		Engine oil	4L
		Hydraulic tank	35L

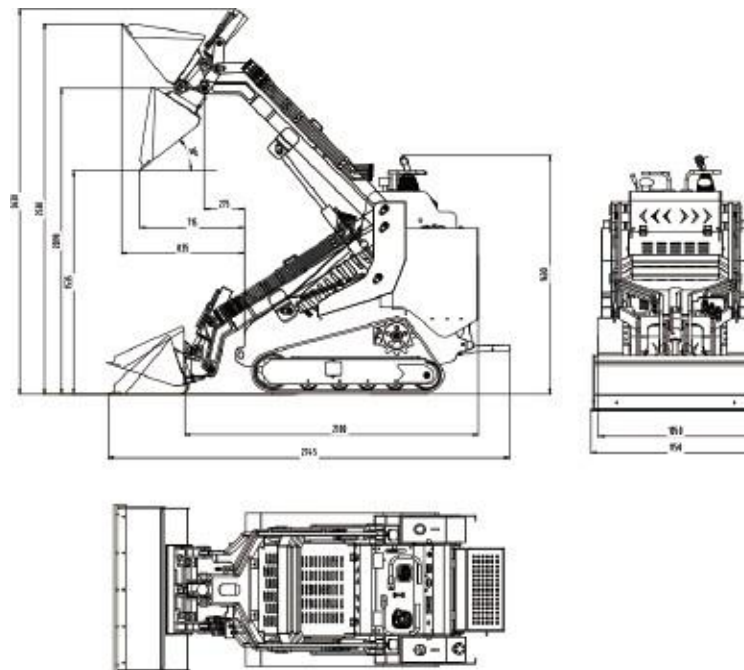



07

Skid Steer Loader-Vormax-S530T



Model:Vormax-S530T			
Max working height	2420mm	Engine	RATO R740
Max pin height	2085 mm	Rated Power	17KW
Max Dumping height	1580mm	Rotating speed	3600rpm
Max Dumping distance	755mm	Noise	≤95Db
Max Dumping Angle	29°	Hydraulic System	
Total height	1630 mm	Pressure	0-17Mpa
Ground clearance	150 mm	Flow rate	0-36L
Wheel base		Operating Load	380 Kg
Overall length without bucket	2220 mm	Bucket Capacity	0.2m³
Total width	1070 mm	Max Lifting Force	500 Kg
Bucket width	1150mm	Travel Speed	0-4.5Km/h
Total length with bucket	2725 mm	Oil Fuel tank	30L
overall length without the bucket after folding the pedal.	2055 mm	Oil Engine oil	1.5L
		Oil Hydraulic tank	35L


Corporate Email:
ethan@qingdaovormaxmachinery.com

WhatsApp/WeChat:
+86 18853773089

07

Skid Steer Loader-Vormax-V1000

Model:Vormax-V1000		
Key Specifications	Rated Power (KW)	18.4(25Hp)
	Operating Weight	1538 Kg
	Rated Operating Capacity	454 kg
	Ground Pressure (Rubber)	2800 Kg/m ²
	Auxiliary Std Flow	45 L/Min
	Rotating speed (Rpm)	2800
	Noise (Db)	≤95
Engine	Emissions Tier	EU NRM 97/68/EC Stage 5
		EPA Tier 4 Final
	Engine Cooling	Liquid
	Engine Fuel	Diesel
	Displacement	1.131 L
	Number of Cylinders	3
Performance	Tipping Load	1315 KG
	Travel Speed	5.8 Km/h
	Travel Speed - Reverse	3.9 Km/h
Capacities	Fuel Tank	25 L
	Hydraulic oil tank capacity	22 L
Hydraulic System	Pump Capacity	45 L/ Min
	System Relief @ Quick Couplers	200 Bar

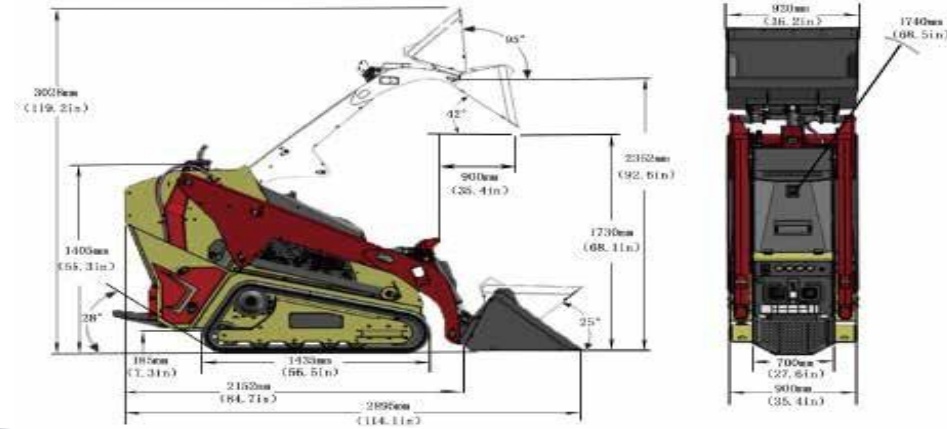



07

Wheel Skid Steer Loader-Vormax-S25



Model:Vormax-S25			
Operating load	380 kg	Overall operating height	3400 mm
Rated flux	50 L/min	Height to top of cab	1813mm
Tire(track)model	6.5-10	Dumping height	2000mm
Rated power	Kubota 25hp/2800rpm	Bucket width	920 mm
Fuel tank capacity	28L	Dumping reach	441mm
Machine Weight	1300 kg	Tread width	785mm
Bucket capacity	0.2 m ³		

Corporate Email:
ethan@qingdaovormaxmachinery.com

WhatsApp/WeChat:
+86 18853773089



07

Skid Steer Loader-Vormax-S35



Model:Vormax-S35

Height at maximum extension	3300mm	Rated operating capacity	500kg
Height to bucket hinge pin	2725mm	Tipping load	1000kg
Width with bucket	1400mm	Bucket capacity	0.3m³
Track width	1080mm	Operationg weight	2200kg
Wheelbase	897mm	Max. travel speed	10km/h
Ground clearance	140mm	Hydraulic pump flow	60L/min
Dump angle	40°	Fuel tank capacity	60L
Dumping height	2050mm	Tires	8.5-15
Maximum reach	790mm	Overall dimensions	2950×1350×2000mm
Angle of departure	20°		
Engine Maker/Model	Xin Chai 490		
Net power	37Kw/2500rpm		
Type	4Cylinder in-line, Water cooled, 4 stroke, Diesel engine		
Standard	Standard bucket	Standard	Preheat starting assist system
	Open cab		for extreme cold weather
	Hydraulic joystick controls		Cab fitted with a heater as standard
	Auxiliary hydraulic couplers		Air conditioner

Corporate Email:
ethan@qingdaovormaxmachinery.com

WhatsApp/WeChat:
+86 18853773089



07

Skid Steer Loader-Vormax-S45



Model:Vormax-S45

Operating load	700 kg	Overall operating height	3980 mm
Rated flux	62.5 L/min	Height to top of cab	2140mm
Tire(track)model	10-16.5	Dumping height	2380mm
Rated power	China Xinchai 37 Kw Euro 5	Bucket width	1740 mm
Fuel tank capacity	70L	Dumping reach	700mm
Machine Weight	2700 kg	Tread width	1450mm
Bucket capacity	0.4 m ³		

Corporate Email:
ethan@qingdaovormaxmachinery.com

WhatsApp/WeChat:
[+86 18853773089](tel:+8618853773089)



07

Skid Steer Loader-Vormax-S50



Model:Vormax-S50			
Operating load	750 kg	Overall operating height	4058mm
Departure angle	23°	Height to top of cab	2007mm
Power	36.8KW/2500rpm	Unloading distance	675mm
Rated power	China Xinchai 490	Wheelbase	999 mm
Fuel tank capacity	70L	Max. unloading height	2303mm
Machine Weight	3003kg	Length with bucket	3413mm
Bucket capacity	0.35m ³	Length without bucket	2700mm

Corporate Email:
ethan@qingdaovormaxmachinery.com

WhatsApp/WeChat:
+86 18853773089



QingDao Vormax Construction Machinery Co., Ltd.

07

Skid Steer Loader-Vormax-S60



Model:Vormax-S60

Operating load	700 kg	Overall operating height	3350 mm
Rated flux	60 L/min	Height to top of cab	2050mm
Tire(track)model	300X52.5	Dumping height	2100mm
Rated power	China Xinchai 36Kw Euro 5	Bucket width	1500 mm
Fuel tank capacity	50L	Dumping reach	790mm
Machine Weight	2800 kg	Tread width	1102mm
Bucket capacity	0.3 m3		

Corporate Email:
ethan@qingdaovormaxmachinery.com

07

Skid Steer Loader-Vormax-S65



Model:Vormax-S65

Operating load	700 kg	Overall operating height	3350 mm
Rated flux	60 L/min	Height to top of cab	2050mm
Tire(track)model	300X52.5	Dumping height	2100mm
Rated power	China Xinchai 36Kw Euro 5	Bucket width	1500 mm
Fuel tank capacity	50L	Dumping reach	790mm
Machine Weight	2800 kg	Tread width	1102mm
Bucket capacity	0.3 m3		

WhatsApp/WeChat:
[+86 18853773089](tel:+8618853773089)



07

Skid Steer Loader-Vormax-S75



Model:Vormax-S75			
Operating load	1050kg	Overall operating height	4070mm
Rated flux	75L/min	Height to top of cab	2160mm
Wheel model	12-16.5	Dumping height	2450mm
Rated power	China Xinchai 55Kw Euro 5	Bucket width	1880mm
Fuel tank capacity	75L	Dumping reach	700mm
Machine Weight	3500kg	Tread width	1500mm
Bucket capacity	0.5 m ³		



Corporate Email:
ethan@qingdaovormaxmachinery.com

WhatsApp/WeChat:
[+86 18853773089](https://wa.me/8618853773089)



07

Skid Steer Loader-Vormax-S100

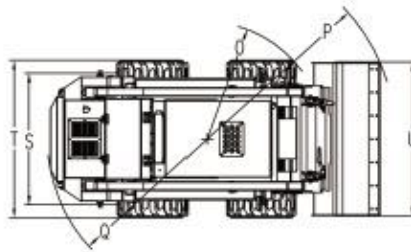

Model:Vormax-S100			
operating weight	3600kg	Height to top of cab	2160mm
Rated load	1200kg	Without bucket length	2963mm
Bucket apacity	0.6m³	Overall length with bucket	3735mm
Max Speed	12/18km/h	Dumping height	2500mm
Rated power	74.9kw/2400rpm	Dumping reach	700mm
Overall operating height	4290mm	Wheelbase	1185mm
Height to bucket hinge pin	3278mm	Ground clearance	205mm



Corporate Email:
ethan@qingdaovormaxmachinery.com

WhatsApp/WeChat:
[+86 18853773089](tel:+8618853773089)



07

Skid Steer Loader-Vormax-S120

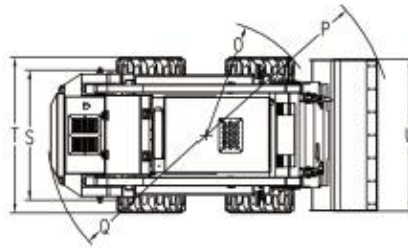

Model:Vormax-S120			
operating weight	4000kg	Height to top of cab	2160mm
Rated load	1500kg	Without bucket length	3023mm
Bucket apacity	0.55m³	Overall length with bucket	3795 mm
Max Speed	12/18km/h	Dumping height	2500mm
Rated power	103kw/2300rpm	Dumping reach	700mm
Overall operating height	4290mm	Wheelbase	1185mm
Height to bucket hinge pin	3278mm	Ground clearance	205mm




Corporate Email:
ethan@qingdaovormaxmachinery.com

WhatsApp/WeChat:
[+86 18853773089](https://wa.me/8618853773089)



07

Skid Steer Loader-Vormax-S125

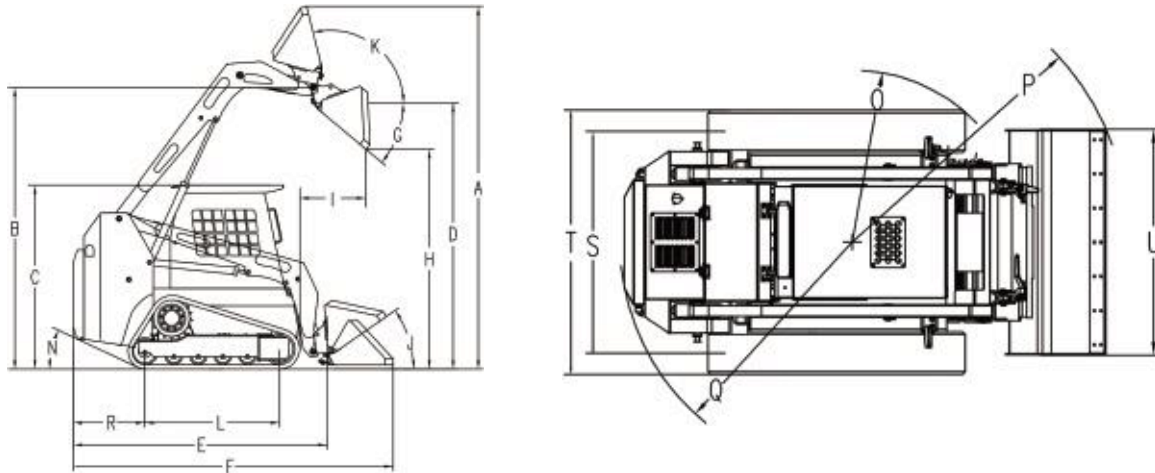

Model:Vormax-S125			
operating weight	5100kg	Height to top of cab	2160mm
Rated load	1500kg	Without bucket length	3000mm
Bucket apacity	0.75m³	Overall ength with bucket	3795 mm
Max Speed	12/18km/h	Dumping height	2450mm
Rated power	103kw/2300rpm	Dumping reach	700mm
Overall operating height	4070mm	Wheelbase	1500mm
Height to bucket hinge pin	3150mm	Ground clearance	200mm



Corporate Email:
ethan@qingdaovormaxmachinery.com

WhatsApp/WeChat:
+86 18853773089

